

ROTATING CRANE HOOKS



POWER ROTATING HOOK



SHEAVE SIZE AND REEVING AVAILABLE FOR ANY HOIST ARRANGEMENT



MILL DUTY BOTTOM BLOCK




LOW HEADROOM PROFILES
CUSTOM REEVING
APPLICATION SPECIFIC
DESIGNS



- ➔ ALLOY STEEL (ASTM A514) PLATE CONSTRUCTION FOR CRITICAL LOAD ZONES
- ➔ FORGED, ALLOY STEEL HOOK
- ➔ ROTATOR WITH ROLLING ELEMENT
- ➔ THRUST BEARING AND BRONZE BUSHINGS
- ➔ STANDARD SHEAVES—35 HRC ROPE SURFACE
- ➔ AVAILABLE 60 HRC CARBURIZED SHEAVES w/ ROLLING ELEMENT BEARINGS
- ➔ ALLOY STEEL SHEAVE PIN WITH LUBRICATION TO EACH SHEAVE
- ➔ ADDITIONAL OPTIONS AVAILABLE

IF YOU CAN MAKE IT, WE CAN LIFT IT

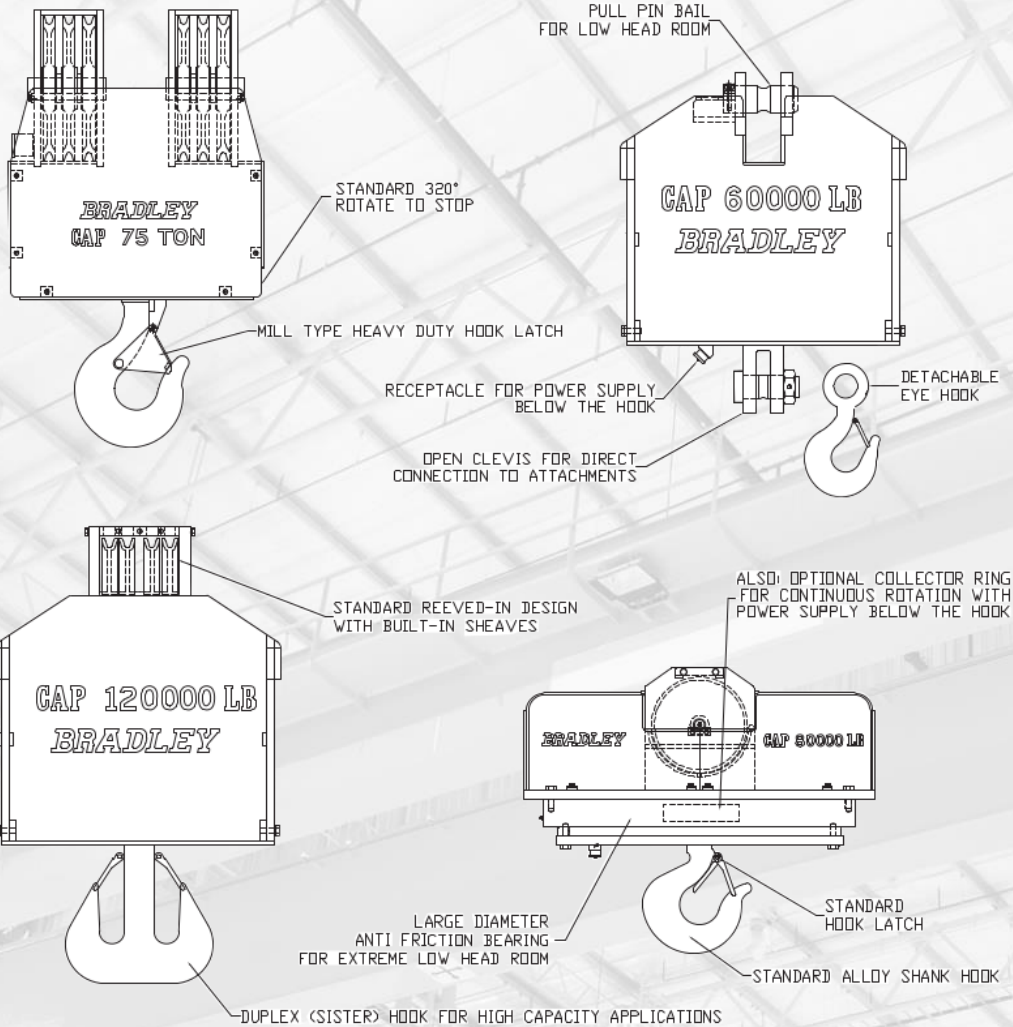

- STANDARD ROTATION 90° OR 320° TO STOPS OR CONTINUOUS ROTATION AT 2 RPM
- AVAILABLE WEIGH SCALE SYSTEMS WITH DIGITAL DISPLAY OR DIRECT COMPUTER INTERFACE
- OPTIONAL MECHANICAL DRIVE DISENGAGE IN CASE OF POWER FAILURE



POWERED ROTATING HOOK
CAPACITIES TO 500 TONS

IF YOU CAN MAKE IT, WE CAN LIFT IT